

Thermal Sensors

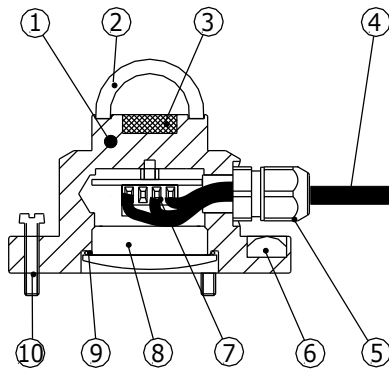


Figure 1 JLP02 solar radiation sensor: (1) JLP02 housing, (2) glass dome, (3) sensor, (4) cable, standard length 5 m, (7) screwed cable connection, (8) access for cable connection/ replacement.

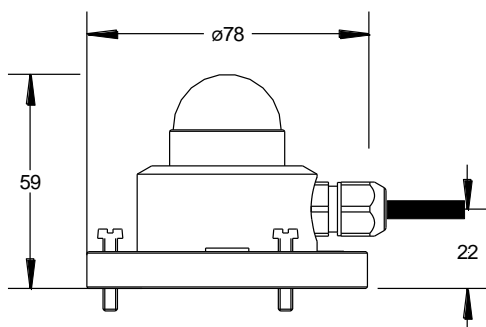


Figure 2 JLP02 dimensions. Standard cable length is 5 m. All dimensions are in mm. Cable can be installed / replaced by the user.

JLP02

SOLAR RADIATION SENSOR COMPLIANT WITH ISO AND WMO STANDARDS

JLP02 is a solar radiation sensor that can be applied for most common solar radiation observations. It complies with the latest ISO and WMO standards. The scientific name of this instrument is pyranometer. JLP02 is a modern alternative for the so-called "star" or "black and white" pyranometers overcoming the problem of poor stability of the white reflective paint.

JLP02 serves to measure the solar radiation flux that is incident on a plane surface in W/m^2 from a 180 degrees field of view (also called "global" solar radiation). Working completely passive, using a thermopile sensor, JLP02 generates a small output voltage proportional to this flux. Contrary to photodiode-based- and "black and white" instruments JLP02 has a spectrally flat response across the full solar spectrum.

Using JLP02 is easy. For readout one only needs an accurate voltmeter that works in the millivolt range. To calculate the radiation level the voltage must be divided by the sensitivity; a constant that is supplied with each individual instrument. JLP02 can directly be connected to most commonly used datalogging systems.

JLP02 can be used for general meteorological observations, building physics, climate- and solar collector testing. A common application is for outdoor solar radiation measurements as part of a meteorological station. This application requires horizontal levelling; levelling feet (7) and a level (11) are included. The JLP02 cable can easily be installed or replaced by the user.

Applicable standards are ISO 9060 and 9847, WMO (World Meteorological Organisation), and ASTM E824-94. JLP02 can also be used for stability estimations according to EPA (EPA-454/R-99-005).

JLP02 SPECIFICATIONS

ISO classification:	second class
Spectral range:	305 to 2800 nm
Sensitivity (nominal):	15 $\mu V/Wm^{-2}$
Temperature range:	-40 to +80 °C
Range :	0 to 2000 Wm^{-2}
Temperature dependence:	< 0.1%/°C
Calibration traceability:	WRR

OPTIONS

- Additional cable length x metres (add to 5m)
- AMF 01 Albedometer Fixture (used with 2 x JLP02)
- AC100 / AC420 amplifiers
- With LI19 readout unit, in handy carrying case